

## 5 Frame Plunger Pump

**Standard Models** 310, 340, 350  
**W770 Models** 310W, 340W, 350W  
**Stainless Steel Models** 311, 341, 351  
**Nickel Aluminum Bronze Models** 317, 347, 357

### FEATURES

#### Superior Design

- Triplex plunger design gives smoother liquid flow.
- Hi-Pressure Seals are completely lubricated and cooled by the liquid being pumped.
- Inlet and discharge valve assemblies interchange for easier maintenance.
- Lubricated Lo-Pressure Seal provides double protection against external leakage.
- Oil bath crankcase assures optimum lubrication.
- Close tolerance concentricity of the ceramic plunger maximizes seal life.
- Convenient direct drive electric motor options.

#### Quality Materials

- Precision design 304 and 316 stainless steel valves and seats are hardened and polished for ultimate seating and extended valve life.
- Forged brass, 316 Stainless Steel, Nickel Aluminum Bronze or special W770 alloy manifolds for strength and corrosion resistance.
- Special concentric, high-density, polished, solid ceramic plungers provide a true wear surface and extended seal life.
- Specially formulated, CAT PUMP exclusive, Hi-Pressure Seals offer unmatched performance and seal life.
- Die cast aluminum crankcase provides high strength, minimum weight and precision tolerance control.
- Chrome-moly crankshaft gives unmatched strength and surface hardness.
- Oversized crankshaft bearings with greater loading capacity mean longer bearing life.

#### Easy Maintenance

- Wet-end is easily serviced without entering crankcase, requiring less time and effort.
- Valve assemblies are accessible without disturbing piping, for quick service.
- Preset packings mean no packing gland adjustment is necessary, reducing maintenance costs.

#### **⚠ WARNING**

All systems require both a primary pressure regulating device (i.e., regulator, unloader) and a secondary pressure safety relief device (i.e., pop-off valve, safety valve). Failure to install such relief devices could result in personal injury or damage to the pump or to system components. CAT PUMPS does not assume any liability or responsibility for the operation of a customer's high pressure system.

### SPECIFICATIONS

	U.S. Measure	Metric Measure
<b>MODEL 310, 310W, 311, 317</b>		
Flow .....	4.0 GPM	(15 L/M)
Pressure Range .....	100 to 2200 PSI	(7 to 155 BAR)
<b>RPM</b> .....	<b>950 RPM</b>	<b>(950 RPM)</b>
Inlet Pressure Range .....	-5 to 60 PSI	(-0.35 to 4 BAR)
<b>Stroke</b> .....	<b>0.709"</b>	<b>(18 mm)</b>
<b>MODEL 340, 340W, 341, 347 Direct Drive</b>		
Flow .....	4.0 GPM	(15 L/M)
Pressure Range .....	100 to 1800 PSI	(7 to 125 BAR)
<b>RPM</b> .....	<b>1725 RPM</b>	<b>(1725 RPM)</b>
Inlet Pressure Range .....	Flooded to 60 PSI	(Flooded to 4 BAR)
<b>Stroke</b> .....	<b>0.394"</b>	<b>(10 mm)</b>
<b>MODEL 350, 350W, 351, 357 Direct Drive</b>		
Flow* .....	5.0 GPM	(19 L/M)
Pressure Range .....	100 to 1500 PSI	(7 to 105 BAR)
<b>RPM</b> .....	<b>1725 RPM</b>	<b>(1725 RPM)</b>
Inlet Pressure Range .....	Flooded to 60 PSI	(Flooded to 4 BAR)
<b>Stroke</b> .....	<b>0.472"</b>	<b>(12 mm)</b>

\*This specification for intermittent, fresh water duty.

### COMMON SPECIFICATIONS

Bore .....	0.787"	(20 mm)
Crankcase Capacity .....	18 oz.	(0.55 L)
Maximum Liquid Temperature .....	160°F	(71°C)
Above 130°F call CAT PUMPS for inlet conditions and elastomer recommendations.		
Inlet Ports (2) .....	1/2" NPTF	(1/2" NPTF)
Discharge Ports (2) .....	3/8" NPTF	(3/8" NPTF)
Shaft Diameter .....	0.787"	(20 mm)
Weight .....	19.8 lbs.	(9 kg)
Dimensions .....	11.69 x 10.0 x 5.26"	(297 x 254 x 133.50 mm)

### ELECTRIC HORSEPOWER REQUIREMENTS

MODEL	FLOW		PRESSURE					MOTOR PULLEY SIZE	
			PSI 1200	PSI 1500	PSI 1800	PSI 2000	PSI 2200	Using 1725 RPM Motor & Std. 8" Pump Pulley	
	U.S. GPM	L/M	BAR 85	BAR 105	BAR 125	BAR 140	BAR 155	RPM	Pulley O.D.
310	5.0	19	4.1	5.1	N/A	N/A	N/A	1190	5.5
	4.0	15	3.3	4.1	5.0	5.5	6.0	950	4.4
	3.0	11.4	2.5	3.1	3.7	4.2	4.5	713	3.3
340	4.0	15	3.3	4.1	5.0	N/A	N/A	1725	Direct Drive
350	5.0	19	4.1	5.1	N/A	N/A	N/A	1725	Direct Drive

**DETERMINING THE PUMP R.P.M.**  $\frac{\text{Rated G.P.M.}}{\text{Rated R.P.M.}}$  = "Desired" G.P.M. "Desired" R.P.M.

**DETERMINING THE REQUIRED H.P.**  $\frac{\text{GPM} \times \text{PSI}}{1460}$  = Electric Brake H. P. Required

**DETERMINING MOTOR PULLEY SIZE**  $\frac{\text{Motor Pulley O.D.}}{\text{Pump R.P.M.}}$  =  $\frac{\text{Pump Pulley O.D.}}{\text{Motor R.P.M.}}$


See complete Drive Packages [Incls: Pulleys, Belts, Hubs, Key] Tech Bulletin 003.  
 Refer to pump **Service Manual** for repair procedure, additional technical information and **pump warranty**.

*"Customer confidence is our greatest asset"*

# PARTS LIST

ITEM	PART NUMBER				DESCRIPTION	QTY
	<b>310</b>	<b>310W</b>	<b>311</b>	<b>317</b>		
	<b>340</b>	<b>340W</b>	<b>341</b>	<b>347</b>		
	<b>350 MATL</b>	<b>350W MATL</b>	<b>351 MATL</b>	<b>357 MATL</b>		
2	30057 STL	30057 STL	30057 STL	30057 STL	Key (M6x6x25)	1
5	<b>92519 STZP</b>	<b>92519 STZP</b>	<b>92538 S</b>	<b>92538 S</b>	Screw, Sems HHC (M6x16)	8
8	43344 AL	43344 AL	43344 AL	43344 AL	Cover, Bearing	1/2
10	43343 NBR	43343 NBR	43343 NBR	43343 NBR	O-Ring, Bearing Cover	2
11	43222 NBR	43222 NBR	43222 NBR	43222 NBR	Seal, Oil, Crankshaft - (310, 350-2) (340-1)	1/2
15	14480 STL	14480 STL	14480 STL	14480 STL	Bearing, Ball	2
20	48737 TNM	48737 TNM	48737 TNM	48737 TNM	Rod, Connecting Assy [10/01]	3
25	<b>43342 FCM</b>	<b>43342 FCM</b>	<b>43342 FCM</b>	<b>43342 FCM</b>	Crankshaft, Dual End - 310, 310W, 311, 317	1
	<b>44945 FCM</b>	<b>44945 FCM</b>	<b>44945 FCM</b>	<b>44945 FCM</b>	Crankshaft, Single End - 340, 340W, 341, 347	1
	<b>43838 FCM</b>	<b>43838 FCM</b>	<b>43838 FCM</b>	<b>43838 FCM</b>	Crankshaft, Dual End - 350, 350W, 351, 357	1
30	44949 AL	44949 AL	44949 AL	44949 AL	Cover, Blind Shaft - 340	1
31	828710 —	828710 —	828710 —	828710 —	Protector, Oil Cap	1
32	43211 ABS	43211 ABS	43211 ABS	43211 ABS	Cap, Oil Filler	1
33	14177 NBR	14177 NBR	14177 NBR	14177 NBR	O-Ring, Filler Cap - 70D	1
37	92241 —	92241 —	92241 —	92241 —	Gauge, Oil, Bubble w/Gasket	1
38	44428 NBR	44428 NBR	44428 NBR	44428 NBR	Gasket, Flat, Oil Gauge - 80D	1
40	<b>92520 STZP</b>	<b>92520 STZP</b>	<b>92542 S</b>	<b>92542 S</b>	Screw, Sems HHC (M6x20)	4
48	25625 STCP	25625 STCP	25625 STCP	25625 STCP	Plug, Drain (1/4"x19 BSP)	1
49	23170 NBR	23170 NBR	23170 NBR	23170 NBR	O-Ring, Drain Plug - 70D	1
50	48772 AL	48772 AL	48772 AL	48772 AL	Cover, Rear [10/01]	1
51	48773 NBR	48773 NBR	48773 NBR	48773 NBR	O-Ring, Rear Cover [10/01]	1
53	48770 AL	48770 AL	48770 AL	48770 AL	Crankcase [10/01]	1
56	43355 POP	43355 POP	43355 POP	43355 POP	Pan, Oil	1
64	43351 CM	43351 CM	43351 CM	43351 CM	Pin, Crosshead	3
65	<b>43365 ZZCP</b>	<b>43365 ZZCP</b>	<b>45256 SSZZ</b>	<b>45256 SSZZ</b>	Rod, Plunger	3
70	43228 NBR	43228 NBR	43228 NBR	43228 NBR	Seal, Oil, Crankcase	3
75	43328 S	43328 S	43328 S	43328 S	Slinger, Barrier	3
88	45697 S	45697 S	45697 S	45697 S	Washer, Keyhole (M18)	3
90	43367 CC	43367 CC	43367 CC	43367 CC	Plunger (M20x72)	3
95	—	—	<b>89653 SS</b>	<b>89653 SS</b>	Stud, Plunger Retainer (M6x58)	3
96	43235 PTFE	43235 PTFE	43235 PTFE	43235 PTFE	Back-up-Ring, Plunger Retainer	3
97	17399 NBR	17399 NBR	17399 NBR	17399 NBR	O-Ring, Plunger Retainer - 80D	3
	14160 FPM	14160 FPM	14160 FPM	14160 FPM	O-Ring, Plunger Retainer - 70D	3
	◆ 46204 EPDM	◆ 46204 EPDM	◆ 46204 EPDM	◆ 46204 EPDM	O-Ring, Plunger Retainer - 70D	3
98	<b>45891 CU</b>	<b>45891 CU</b>	<b>44041 SS</b>	<b>44041 SS</b>	Gasket	3
99	<b>104360 S</b>	<b>104360 S</b>	<b>44031 SS</b>	<b>44031 SS</b>	Retainer, Plunger	3
100	45682 PVDF	45682 PVDF	45682 PVDF	45682 PVDF	Retainer, Seal, Adapter - Front	3
	45681 PVDF	45681 PVDF	45681 PVDF	45681 PVDF	Retainer, Seal - Rear	3
101	43302 —	43302 —	43302 —	43302 —	Wick, Long Tab	3
106	<b>43305 NBR</b>	<b>43305 NBR</b>	—	—	Seal, LPS w/S-Spg	3
	—	—	<b>44127 NBR</b>	<b>44127 NBR</b>	Seal, LPS w/SS-Spg	3
	45153 FPM	45153 FPM	45153 FPM	45153 FPM	Seal, LPS w/SS-Spg	3
	◆ 48429 EPDM	◆ 48429 EPDM	◆ 48429 EPDM	◆ 48429 EPDM	Seal, LPS w/SS-Spg	3
120	<b>45679 BB</b>	<b>45679 BB</b>	<b>45680 SS</b>	<b>45680 SS</b>	Case, Seal	3
121	14200 NBR	14200 NBR	14200 NBR	14200 NBR	O-Ring, Seal Case - 70D	3
	11719 FPM	11719 FPM	11719 FPM	11719 FPM	O-Ring, Seal Case - 70D	3
	◆ 48907 EPDM	◆ 48907 EPDM	◆ 48907 EPDM	◆ 48907 EPDM	O-Ring, Seal Case	3
125	<b>43307 SNG</b>	<b>43307 SNG</b>	—	—	Seal, HPS w/S	3
	—	—	<b>44649 SNG</b>	<b>44649 SNG</b>	Seal, HPS w/SS	3
	44936 FPM	44936 FPM	44936 FPM	44936 FPM	Seal, HPS w/SS	3
	46667 HT*	46667 HT*	46667 HT*	46667 HT*	Seal, HPS w/S "Hi-Temp"	3
139	<b>22179 BB</b>	<b>22179 BB</b>	<b>45156 SS</b>	<b>44563 NAB</b>	Plug, Inlet (1/2" NPT)	1
162	48361 D	48361 D	48361 D	48361 D	Back-up-Ring, Seat	6
163	43358 NBR	43358 NBR	43358 NBR	43358 NBR	O-Ring, Seat - 70D	6
	44938 FPM	44938 FPM	44938 FPM	44938 FPM	O-Ring, Seat - 70D	6
	◆ 48908 EPDM	◆ 48908 EPDM	◆ 48908 EPDM	◆ 48908 EPDM	O-Ring, Seat	6
164	<b>43725 S</b>	<b>43725 S</b>	<b>44128 SSL</b>	<b>44128 SSL</b>	Seat	6
166	<b>43723 S</b>	<b>43723 S</b>	<b>44057 SSL</b>	<b>44057 SSL</b>	Valve	6
167	<b>43750 S</b>	<b>43750 S</b>	<b>44056 SS</b>	<b>44056 SS</b>	Spring, Valve	6
168	44565 PVDF	44565 PVDF	44565 PVDF	44565 PVDF	Retainer, Valve Spring	6
171	—	—	<b>44832 S</b>	<b>44832 S</b>	Spring, Coil	6
172	17615 NBR	17615 NBR	17615 NBR	17615 NBR	O-Ring, Valve Plug - 75D	6
	15855 FPM	15855 FPM	15855 FPM	15855 FPM	O-Ring, Valve Plug - 70D	6
	◆ 48431 EPDM	◆ 48431 EPDM	◆ 48431 EPDM	◆ 48431 EPDM	O-Ring, Valve Plug - 75D	6
174	<b>43849 BB</b>	<b>43849 BB</b>	<b>45155 SS</b>	<b>44833 NAB</b>	Plug, Valve	6
185	<b>44837 BB</b>	<b>46825 W770</b>	—	—	Manifold Head	1
	—	—	<b>45151 SS</b>	<b>44124 NAB</b>	Manifold Head	1
186	<b>12503 STZP</b>	<b>12503 STZP</b>	<b>15847 S</b>	<b>15847 S</b>	Lockwasher (M10)	2
188	<b>124396 STZP</b>	<b>124396 STZP</b>	<b>87950 S</b>	<b>87950 S</b>	Screw HSH (M10x35) [01/04]	2
196	<b>43633 BB</b>	<b>43633 BB</b>	—	—	Plug, Discharge (3/8" NPT)	1
250	118672 STCP	118672 STCP	118672 STCP	118672 STCP	Protector, Shaft (Belt Drive Only)	1
255	30243 STZP	30243 STZP	30243 STZP	30243 STZP	Mount, Direct (Belt Drive Only)	1
260	30611 STZP	30611 STZP	30611 STZP	30611 STZP	Mounting, Angle Rail - B	1
	—	—	—	—	(28499,30900,30910,30920) (Belt Drive Only)	1
265	30659 —	30659 —	30659 —	30659 —	Mount, Assy	1
	—	—	—	—	(30611,30633,118672) (Belt Drive Only)	1
270	30633 STL	30633 STL	30633 STL	30633 STL	Assy, Pulley & Key (30058,30057) (Belt Drive Only)	1
275	30944 STL	30944 STL	30944 STL	30944 STL	Assy, Hub & Key (M20 w/M6 Keyway) (Belt Drive Only)	1
	—	—	—	—	<b>[See Drive Packages, Tech Bulletin 003]</b>	
283	34334 —	34334 —	34334 —	34334 —	Kit, Oil Drain	1
298	34962 STZP	34962 STZP	34962 STZP	34962 STZP	Clutch Assy, Single Groove, 20mm, 12VDC	1
	34963 STZP	34963 STZP	34963 STZP	34963 STZP	Clutch Assy, Dual Groove, 20mm, 12VDC	1
299	<b>810027 BB</b>	<b>810027W W770</b>	<b>812207 SS</b>	<b>814559 NAB</b>	Head, Complete	1

# EXPLODED VIEW

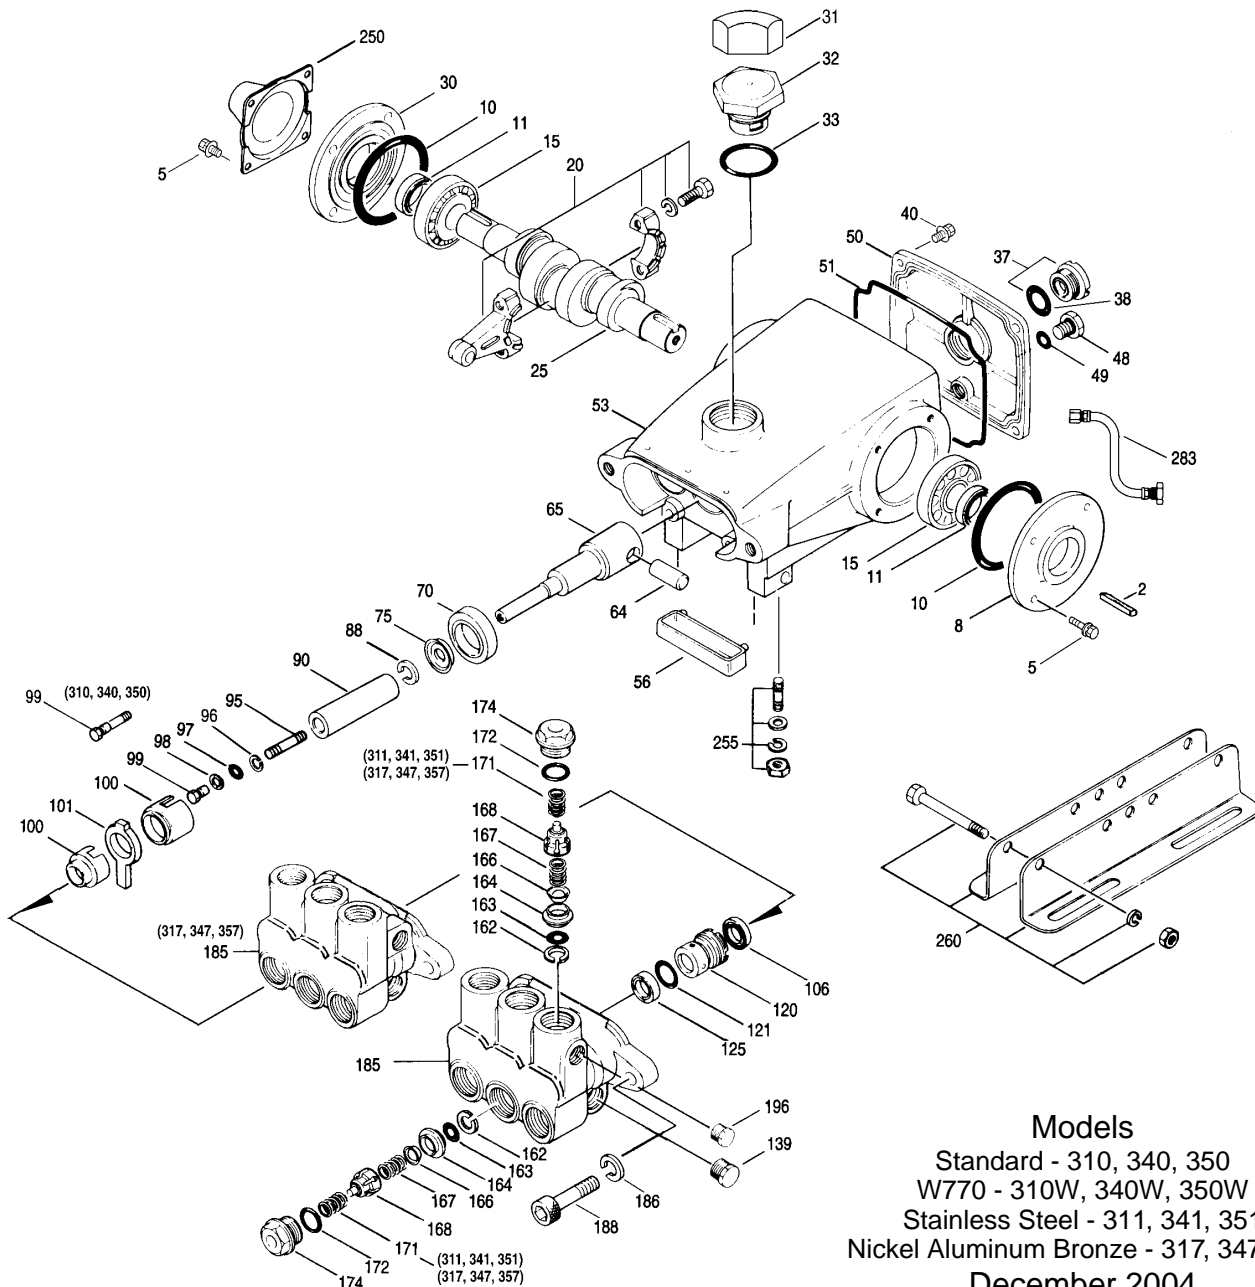


**Models**  
 Standard - 310, 340, 350  
 W770 - 310W, 340W, 350W  
 Stainless Steel - 311, 341, 351  
 Nickel Aluminum Bronze - 317, 347, 357  
 December 2004


	<b>310</b>	<b>310W</b>	<b>311</b>	<b>317</b>	
	<b>340</b>	<b>340W</b>	<b>341</b>	<b>347</b>	
	<b>350 MATL</b>	<b>350W MATL</b>	<b>351 MATL</b>	<b>357 MATL</b>	
300	30623 <i>NBR</i>	30623 <i>NBR</i>	34153 <i>NBR</i>	34153 <i>NBR</i>	Kit, Seal (Incls: 97,101,106,121,125)
	34155 <i>FPM</i>	34155 <i>FPM</i>	34155 <i>FPM</i>	34155 <i>FPM</i>	Kit, Seal (Incls: 97,101,106,121,125)
	33623 <i>HT</i>	33623 <i>HT</i>	33623 <i>HT</i>	33623 <i>HT</i>	Kit, Seal, "Hi-Temp" (Incls: 97,101,106,121,125)
	◆ 31163 <i>EPDM*</i>	◆ 31163 <i>EPDM*</i>	◆ 31163 <i>EPDM*</i>	◆ 31163 <i>EPDM*</i>	Kit, Seal (Incls: 97,101,106,121,125)
310	30821 <i>NBR</i>	30821 <i>NBR</i>	—	—	Kit, Valve (Incls: 162-164,166-168,172)
	—	—	31152 <i>NBR</i>	31152 <i>NBR</i>	Kit, Valve (Incls: 162-164,166-168,171,172)
	31821 <i>FPM</i>	31821 <i>FPM</i>	—	—	Kit, Valve (Incls: 162-164,166-168,172)
	—	—	34152 <i>FPM</i>	34152 <i>FPM</i>	Kit, Valve (Incls: 162-164,166-168,171,172)
	◆ 31162 <i>EPDM</i>	◆ 31162 <i>EPDM</i>	—	—	Kit, Valve (Incls: 162-164,166-168,172)
350	30696 <i>STZP</i>	30696 <i>STZP</i>	30696 <i>STZP</i>	30696 <i>STZP</i>	Plier, Reverse
351	33004 <i>STZP</i>	33004 <i>STZP</i>	33004 <i>STZP</i>	33004 <i>STZP</i>	Socket, Seal Case (1/2" Drive)
—	—	—	—	—	BD Motors - See Individual Data Sheet
—	6107	6107	6107	6107	Oil, Bottle (21 oz.) ISO 68 Multi-viscosity Hydraulic (Fill to specified crankcase capacity prior to start-up)
—	—	—	6119	—	Lubricant, Antiseize (1 oz.)

**Bold print part numbers are unique to a particular pump model. Italics are optional items. ◆ Silicone oil/grease required.**

[ ] Date of latest production change. \*Review material codes for individual items (HT generally may be used as alternate). Add .3000 to part numbers for Hi-Temp model. See Tech Bulletins 002, 003, 008, 024, 027, 032, 035, 036, 043, 045, 046, 049, 052, 053, 054, 073, 074, 077, 079, 083 and 090 for additional information.  
 MATERIAL CODES (Not Part of Part Number): ABS=ABS Plastic AL=Aluminum BB=Brass BBCP=Brass/Chrome Plated CC=Ceramic CM=Chrome-moly  
 CU=Copper D=Acetal EPDM=Ethylene Propylene Diene Monomer FCM=Forged Chrome-moly FPM=Fluorocarbon HT=High Temp (EPDM Alternative)  
 NAB=Nickel Aluminum Bronze NBR=Medium Nitrile (Buna-N) POP=Polypropylene PTFE=Pure Polytetrafluoroethylene PVDF=Polyvinylidene Fluoride  
 S=304SS SNG=Special Blend (Buna) SS=316SS SSL=316SS/Low Carbon SSZZ=316SS/Zamak STL=Steel STCP=Steel/Chrome Plated STZP=Steel/Zinc Plated  
 TNM=Special High Strength W770=Special Alloy ZZCP=Chrome Plated/Steel - Zamak

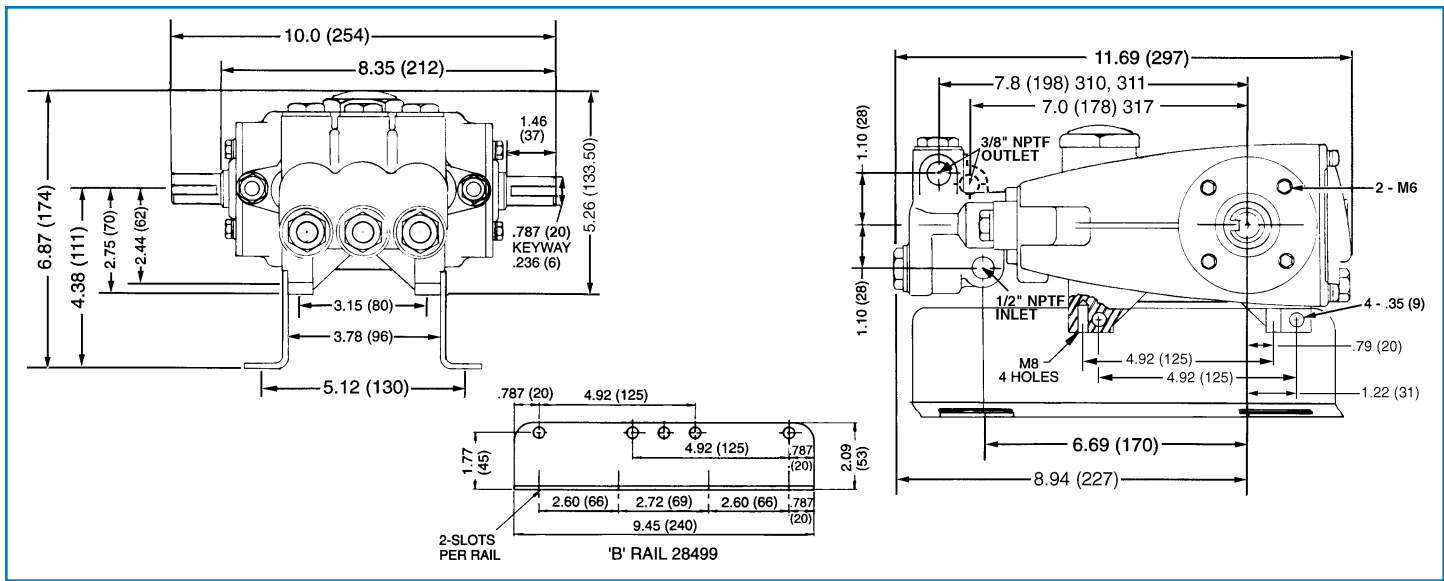

Models 310, 340, 350

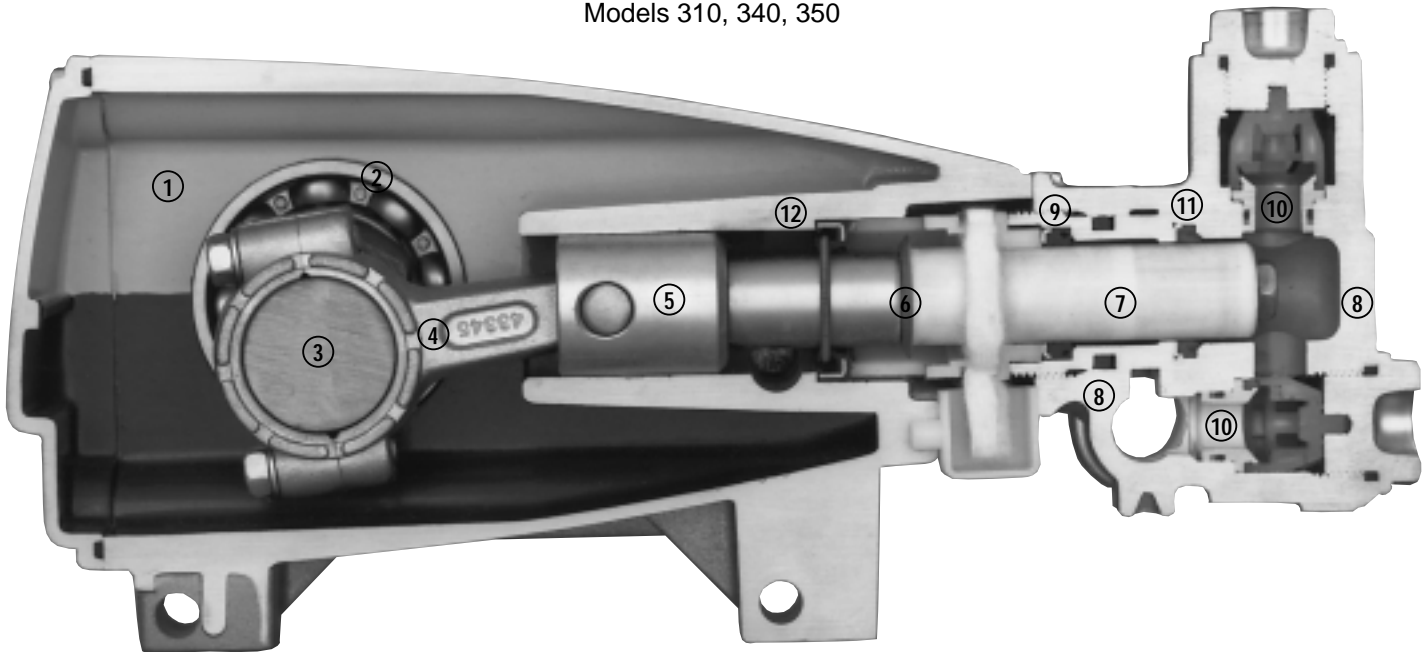

- 1 Die cast aluminum **crankcase** means high strength, lightweight, and excellent tolerance control.
- 2 Oversized crankshaft **bearings** provide extended bearing life and pump performance.
- 3 Chrome-moly **crankshaft** provides unmatched strength and surface hardness for long life.
- 4 Matched oversized TNM **connecting rods** noted for superior tensile strength and bearing quality.
- 5 Special high strength **plunger rods** with Zamak crossheads for longevity and corrosion resistant.
- 6 The stainless steel **slinger** provides back-up protection for the crankcase seal, keeping pumped liquids out of the crankcase.
- 7 Special concentric, high-density, polished, solid ceramic **plungers** provide a true wear surface and extended seal life.
- 8 **Manifolds** are a high tensile strength forged brass, 316 stainless steel, nickel aluminum bronze or W770 alloy for long life, continuous duty and compatibility.
- 9 100% wet **seal** design adds to service life by allowing pumped liquids to cool and lubricate on both sides.
- 10 Stainless steel **valves, seats and springs** provide corrosion-resistance, ultimate seating and extended life.
- 11 Specially formulated, CAT PUMP exclusive, **Hi-Pressure Seals** offer unmatched performance and seal life.
- 12 **Crossheads** are 360° supported for uncompromising alignment.

Products described hereon are covered by one or more of the following U.S. patents 3558244, 3652188, 3809508, 3920356, 3930756 and 5035580

**World Headquarters**  
**CAT PUMPS**  
 1681 - 94th Lane N.E. Minneapolis, MN 55449-4324  
 Phone (763) 780-5440 — FAX (763) 780-2958  
 e-mail: techsupport@catpumps.com  
 www.catpumps.com

**International Inquiries**  
 FAX (763) 785-4329  
 e-mail: intlsales@catpumps.com



**CAT PUMPS (U.K.) LTD.**  
 1 Fleet Business Park, Sandy Lane, Church Crookham, Fleet  
 Hampshire GU52 8BF, England  
 Phone Fleet 44 1252-622031 — Fax 44 1252-626655  
 e-mail: sales@catpumps.co.uk

**N.V. CAT PUMPS INTERNATIONAL S.A.**  
 Heiveldekens 6A, 2550 Kontich, Belgium  
 Phone 32-3-450.71.50 — Fax 32-3-450.71.51  
 e-mail: cpi@catpumps.be www.catpumps.be

**CAT PUMPS DEUTSCHLAND GmbH**  
 Buchwiese 2, D-65510 Idstein, Germany  
 Phone 49 6126-9303 0 — Fax 49 6126-9303 33  
 e-mail: catpumps@t-online.de www.catpumps.de