


POWERED by HONDA™ CENTRIFUGAL PUMPS

Outstanding Features


- Impellers and Volutes are Constructed of Cast Iron for Durability, and Long Operating Life (Engine Pumps Larger than 1" NPT)
- Pump Housings are Made of Die Cast Aluminum for Strength, Weight Reduction, and Portability
- Strong Transport Protection Powder Coated Steel Roll Cages (Engine Pumps 2" or Larger)
- Honda Engines with Low Oil Shut Off (Engine Pumps 2" or Larger)
- Self Priming up to 26', and a Maximum Head up to 141'
- Two Year Limited Warranty On Pump Ends



SEH-25L

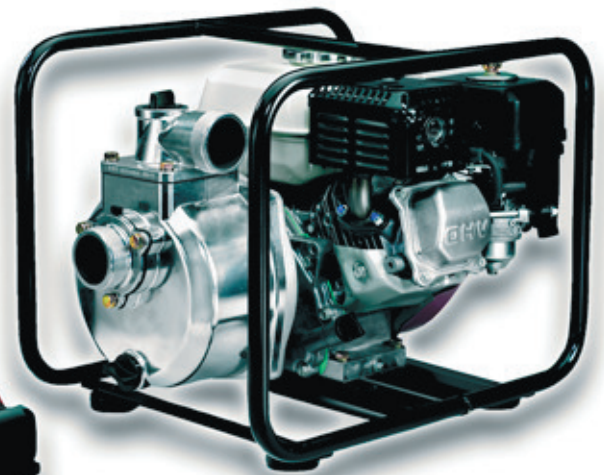


SEH-50X

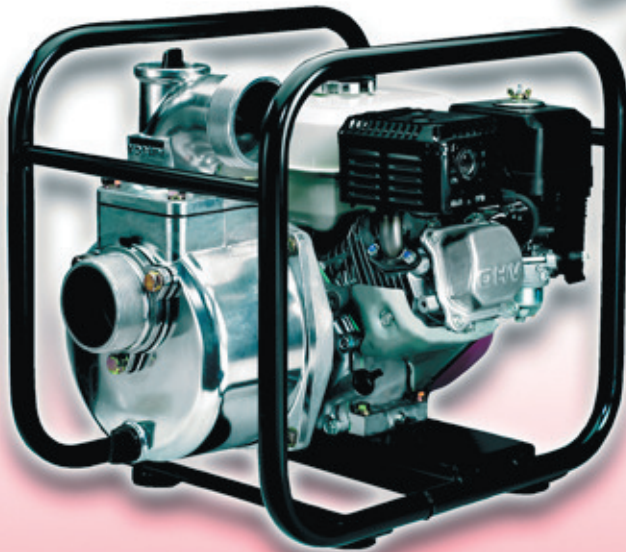

SEH-80X

Lynco Lynco Products Inc
 # 114, 1220 - 28 STREET N.E
 CALGARY, AB T2A 6A2
 403-250-3600 / 1-877-249-3600
 sales@lyncoopro.com / www.lyncoopro.com

PERFORMANCE CURVES

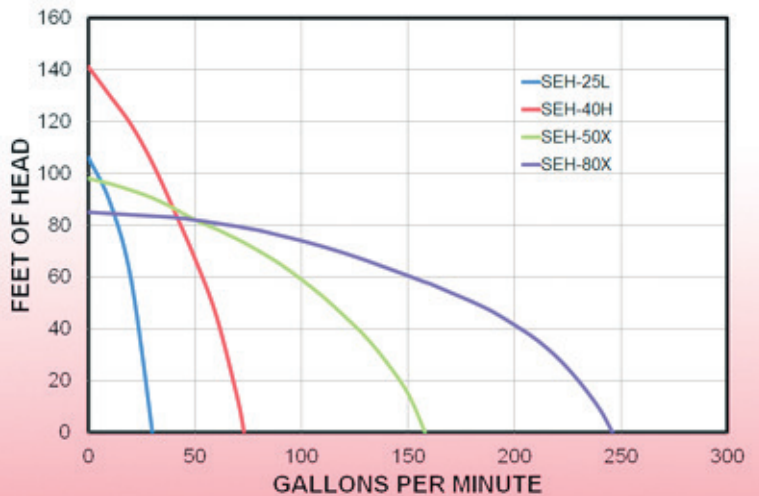

	SEH-25L	SEH-40H	SEH-50X	SEH-80X
Suction, Discharge Size	1" NPT	1½" NPT	2" NPT	3" NPT
Maximum Output (GPM)	30	73	158	246
Maximum Discharge Head (ft)	106	141	98	85
Maximum Suction Lift (ft)	26	26	26	26
Maximum Pressure (Psi)	45.9	61	42.4	36.8
Engine Model	GX25	GX50H	GX120	GX160
Engine Displacement (cc)	25	49.4	118	163
Engine Horse Power	1	2.1	3.5	4.8
Fuel Tank Capacity (Gal)	0.15	0.20	0.66	0.82
Full Load Run Time (hrs)	1.2	0.83	2.5	2.5
Fuel Type	Unleaded Automotive Gasoline			
Packaged Weight (Lbs)	16	26	55	70
Packaged Dimensions (LxWxH)	15"x10"x13"	16"x13"x18"	18"x14"x15"	20"x15"x18"



SEH-40H